

**Machine Rating**

Rated operating capacity (ISO 14397-1)	894 kg
Tipping load (ISO 14397-1):	1788 kg
Pump capacity	64.70 L/min
Pump capacity (with high flow option)	101.10 L/min
System relief at quick couplers	23.8-24.5 MPa
Max. travel speed (high range - option)	17.3 km/h
Max. travel speed (low range)	11.8 km/h

**Engine**

Make / Model	Kubota / V2607-DI-T-E3B-BC-2
Fuel	Diesel
Cooling	Liquid
Maximum power at 2700 RPM (SAE J1995)	45.5 kW
Torque at 1425 RPM (SAE J1995 Gross)	201.0 Nm
Number of cylinders	4
Displacement	2600 cm <sup>3</sup>
Fuel tank	93.70 L

**Weights**

Operating weight	2841 kg
Shipping weight	2503 kg

**Controls**

Vehicle steering	Direction and speed controlled by two hand levers or optional Advanced Control System (ACS), Advanced Hand Controls (AHC) or Selectable Joystick Controls (SJC)
Loader hydraulics tilt and lift	Separate foot pedals or optional Advanced Control System (ACS), Advanced Hand Controls (AHC) or Selectable Joystick Controls (SJC)
Front auxiliary (standard)	Electrical switch on right-hand steering lever

**Drive System**

Transmission	Infinitely variable tandem hydrostatic piston pumps, driving two fully reversing hydrostatic motors
--------------	---

**Standard Features**

Cushion suspension seat	Lift arm support
Automatically activated glow plugs	Noise reduction kit
Auxiliary hydraulics: variable flow/maximum flow	Work lights, front and rear
Bob-Tach™ frame	Parking brake
Bobcat Interlock Control System (BICS)	Seat belt
Deluxe operator cab with windows <sup>1</sup>	Seat bar
Electrically activated proportional front auxiliary hydraulics	Spark arrester muffler
Engine/hydraulics system shutdown	10 x 16.5, 10-ply, Heavy duty tyres
Hydraulic bucket positioning (including ON/OFF switch)	CE certification
Instrumentation	Warranty: 12 months or 2000 hours (whichever occurs first)

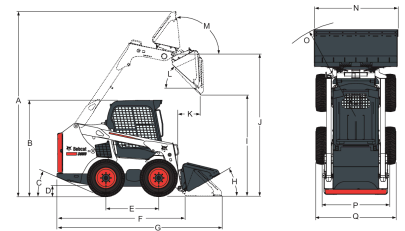
1. Roll Over Protective Structure (ROPS) – meets requirements of SAE-J1040 and ISO 3471; Falling Object Protective Structure (FOPS) - meets requirements of SAE-J1043 and ISO 3449, Level I

**Options**

High-Flow hydraulics	Advanced Hand Controls (AHC)
Deluxe instrument panel	Selectable Joystick Controls (SJC)
Power Bob-Tach™	Two speed
Cab enclosure with heating	Air ride seat with 2 point seat belt
Cab enclosure with HVAC	Back-up alarm
10 x 16.5, 10-ply, Heavy duty tyres, offset rims	Beacon
10 x 16.5, 10-ply, Severe duty tyres	Engine block heater
12 x 16.5, 12-ply, Severe duty tyres, poly filled	Fire extinguisher
12 x 16.5, Solid flex tyres	Radio
31 x 12-16.5, 10-ply, Superflotation tyres	Road kit
Advanced Control System (ACS)	Strobe

**Environmental**

Fuel consumption at 100% engine load	12.90 L/min
Fuel consumption at 70% engine load	10.20 L/min
Fuel consumption at 50% engine load	9.10 L/min
Fuel consumption at 30% engine load	7.90 L/min

**Dimensions**


(A) 3787.0 mm	(J) 2908.0 mm
(B) 1972.0 mm	(K) 432.0 mm
(C) 24.2°	(L) 42.0°
(D) 185.0 mm	(M) 97.0°
(E) 1082.0 mm	(N) 1727.0 mm
(F) 2657.0 mm	(O) 2032.0 mm
(G) 3378.0 mm	(P) 1374.0 mm
(H) 30.0°	(Q) 1643.0 mm
(I) 2205.0 mm	

**Attachments**

Angle Brooms	Pallet Forks, Standard
Augers	Planers
Backhoes	Rear Stabilizers
Bale Forks	Root Grapples
Box Blades	Scarifiers
Breakers	Scrapers
Brushcat™ Rotary Cutters	Seeders
Brush Saws	Skeleton Buckets
Bucket Adapters	Snow & Light Material Buckets
Combination Buckets	Snow Blades
Concrete Mixers	Snow Blowers
Concrete Pumps	Snow Pushers
Construction / Industrial Buckets	Snow V-Blades
Cutter Crushers	Sod Layers
Diggers	Soil Conditioners
Dozer Blades	Spare Wheels
Drop Hammers	Spreaders
Dumping Hoppers	Steel Tracks
Fertilizer and Grain Buckets	Stump Grinders
Flail Cutters	Sweepers
General Purpose (GP)	Tillers
Bucket	Tilt-Tatch
Graders	Tree Transplanters
Grapples, Industrial	Trench Compactors
Landplanes	Trenchers
Landscape Rakes	Utility Forks
Laser Equipment	Utility Frames
Low Profile Buckets	Vibratory Rollers
Miscellaneous	Water Kits
Mixing Buckets	Wheel Saws
Mowers	Whisker Brooms
Packer Wheels	Wood Chippers
Pallet Fork Accessories	
Pallet Forks, Hydraulic	